

Linear Ultra Low Shower Base SMFLU Tub Replacement End Drain


FEATURES

- Single threshold for alcove installation.
- SMC Sheet Molding Compound is made from a composite material composed of resin, fiberglass, and stone filler. Compression molded for precision radius and angles. Strong, lightweight, slip resistant and scratch resistant.
- Designed to replace existing bathtub drain locations. Base uses same footprint and drain location. Beautiful, easy to clean and ultra-safe stone-look slip resistant texture provides comfortable, safe footing.
- Ultra low 2.6" threshold front curb for easy access as well as ultra wide 3.5" threshold width to hold modern barn door shower doors.
- Heavy duty 1" high integral tiling flange will not crack on the way to the jobsite.
- Super strong base with ribbed construction. Up to 21% heavier than competitive bases.
- Color matched lift-off drain cover allows for easy cleaning and conceals a conventional shower drain. Eliminates the need for decorative drain covers to match faucetry. Drain not included.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty




Optional Stainless Steel Cover

Features an optional stainless steel cover for commercial duty. Made from 304 Stainless Steel.



Ribbed Structure for superior strength. Up to 21% heavier than competitive bases.



Modern Slip Resistance with a stone look texture. Easy to clean as well as slip resistant.

Specified Model	Drain Location		Length	Width	HT.
	Left	Right			
<input type="checkbox"/> 60" x 30" x 2.6"	SMFLU6030L	SMFLU6030-R	60"	30"	2.6"
<input type="checkbox"/> 60" x 32" x 2.6"	SMFLU6032L	SMFLU6032-R	60"	32"	2.6"

Model	A	B	C	D	E	F	G
SMFLU6030L/R	60"	30"	8.25"	2.6"	3.5"	14.1"	29.8"
SMFLU6032L/R	60"	32"	8.25"	2.6"	3.5"	15.1"	31.8"

To Be Specified: Color

<input type="checkbox"/> 31 White			
<input type="checkbox"/> 38 Biscuit			
<input type="checkbox"/> 39 Grey			
	White 31	Biscuit 38	Grey 39


Optional : Brushed Stainless Steel Drain Cover

	Model	Size	Corresponding SMFL Base
<input type="checkbox"/>	SMFLUCVR30-SS	24.5" X 5"	SMFLU6030L/R
<input type="checkbox"/>	SMFLUCVR32-SS	26.5" X 5"	SMFLU6032L/R

Compliance Certifications -

Meets or Exceeds the Following Specifications

- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- ASTM 1028-96 coefficient of friction test (minimum rating of 0.67)
- IAPMO
- cUPC®

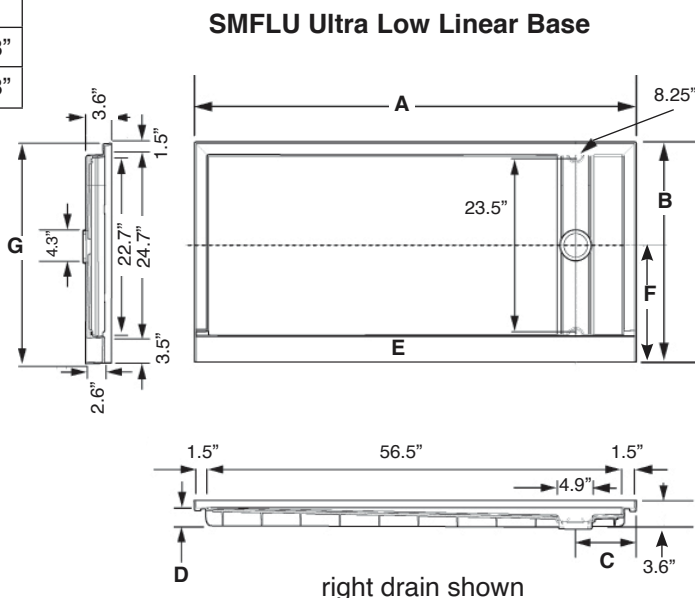

SHOWER BASES