

# **Linear Ultra Low Shower Base SMFLU Tub Replacement End Drain**

#### **FEATURES**

- Single threshold for alcove installation.
- Transtone® is made from a composite material composed of resin, fiberglass, and stone filler. Compression molded for precision radius and angles. Strong, lightweight, slip resistant and scratch resistant.
- Designed to replace existing bathtub drain locations. Base uses same footprint and drain location. Beautiful, easy to clean and ultrasafe stone-look slip resistant texture provides comfortable, safe footing.
- Ultra low 2.6" threshold front curb for easy access as well as Ultra wide 3.5" threshold width to hold modern barn door shower doors
- Heavy duty 1" h. integral tiling flange will not crack on the way to the
- Super strong base with ribbed construction. Up to 21% heavier than competitive bases.
- Lift-off drain cover allows for easy cleaning and conceals a conventional shower drain. Eliminates need for decorative drain covers to match faucetry.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

Specified Model		Drain I				
	SIZE	Left	Right.	Length	Width	HT.
	60" x 30" x 2.6"	SMFLU6030L	SMFLU6030R	60"	30"	2.6"
	60" x 32" x 2.6"	SMFLU6032L	SMFLU6032R	60"	32"	2.6"







Ribbed Struture for superior strength. Up to 21% heavier than competitive bases


Modern Slip Resistance with a stone look texture. Easy to clean as well as slip resistant.


#### Optional: S.S. Cover

SSU30CVR.	Brushed S.S		
SSU32CVR.	Brushed S.S		

Model	Α	В	С	D	Е	F	G
SMFLU6030L/R	60"	30"	8.25"	2.6"	3.5"	14.1"	29.8"
SMFLU6032L/R	60"	32"	8.25"	2.6"	3.5"	15.1"	31.8"

### **SMFLU Ultra Low Linear Base**



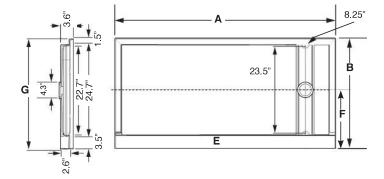

56.5"

right drain shown

## **Compliance Certifications -**Meets or Exceeds the Following Specifications

- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO
- cUPC®

