

## Commercial Flushometer ADA Floor-Mounted Toilet – 1.0/1.28 GPF

### FEATURES

- Floor-mounted
- ADA compliant
- Elongated front bowl
- Optional CEFIONTECT® glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating
- 10"-12" rough-in
- Designed for reclaimed water use

### MODELS

- CT705ULNGX  
Commercial ADA compliant, floor-mounted toilet with CEFIONTECT ceramic glaze
- CT705ULNX  
Commercial ADA compliant floor-mounted toilet

### ADDITIONAL ITEMS

- SC534 seat
- SC134 seat

EcoPower® Flush Valves	
Exposed	
TET1UAX32#CP	1.0 GPF
TET1LAX32#CP	1.28 GPF



### CEFIONTECT

### COLORS/FINISHES

- Standard  
#01 Cotton

### PRODUCT SPECIFICATION

The floor-mounted, ADA compliant low consumption siphon jet flushing toilet shall be 1.0 or 1.28 GPF (3.8 or 4.8 LPF) when paired with a flush valve of corresponding flush volume. Toilet shall have optional CEFIONTECT ceramic glaze. Toilet shall be TOTO Model CT705ULN(G)X\_\_\_\_\_.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant



# CT705ULN(G)X

## Commercial Flushometer ADA Floor-Mounted Toilet – 1.0/1.28 GPF

### SPECIFICATIONS

<b>Water Use</b>	1.0/1.28 GPF (3.8/4.8 LPF)
<b>Flush System</b>	Siphon Jet Flushing Action
<b>Water Surface</b>	10-3/4" x 9-1/4"
<b>Water Pressure</b>	Min: 35 psi (Flowing) Max: 80 psi (Static)
<b>Min. Flow Rate</b>	24 GPM
<b>Trap Diameter</b>	1-7/8"
<b>Trap Seal</b>	2-3/8"
<b>Rough-in</b>	12" or 10"
<b>Material</b>	Vitreous China
<b>Warranty</b>	One Year Limited Warranty
<b>Shipping Weight</b>	58 lbs
<b>Shipping Dimensions</b>	26-1/2"L x 9-1/2" W1 x 16-1/4"W2 x 19-1/2"H

### INSTALLATION NOTES


RECLAIMED WATER QUALITY PARAMETERS	
<b>Chloride Ion Concentration</b>	< 600mg/L
<b>pH</b>	5.8~8.6
<b>Free Carbonate</b>	< 50mg/L
<b>Langelier's Index</b>	> -3.00
<b>Nitrate Ion Concentration</b>	< 60mg/L
<b>Conductivity</b>	< 250mS/m
<b>Sulfate Ion Concentration</b>	< 100mg/L
<b>Residual Chlorine Concentration</b>	< 2mg/L
<b>Hydrogen Sulfide Gas</b>	None Existance
<b>Suspended Solids</b>	< 5mg/L

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073RX.

Can be used with exposed or concealed top inlet flush valves.

TOTO Reclaimed Water flush valves are designed to perform best when used with TOTO Reclaimed Water urinals/toilets and components. Although TOTO Reclaimed Water products may be used in combination with other reclaimed water product brands, optimal performance might be impaired and attempted use with any non-compliant reclaimed water product(s) could result in corrosion, leakage or void the warranty.

### DIMENSIONS

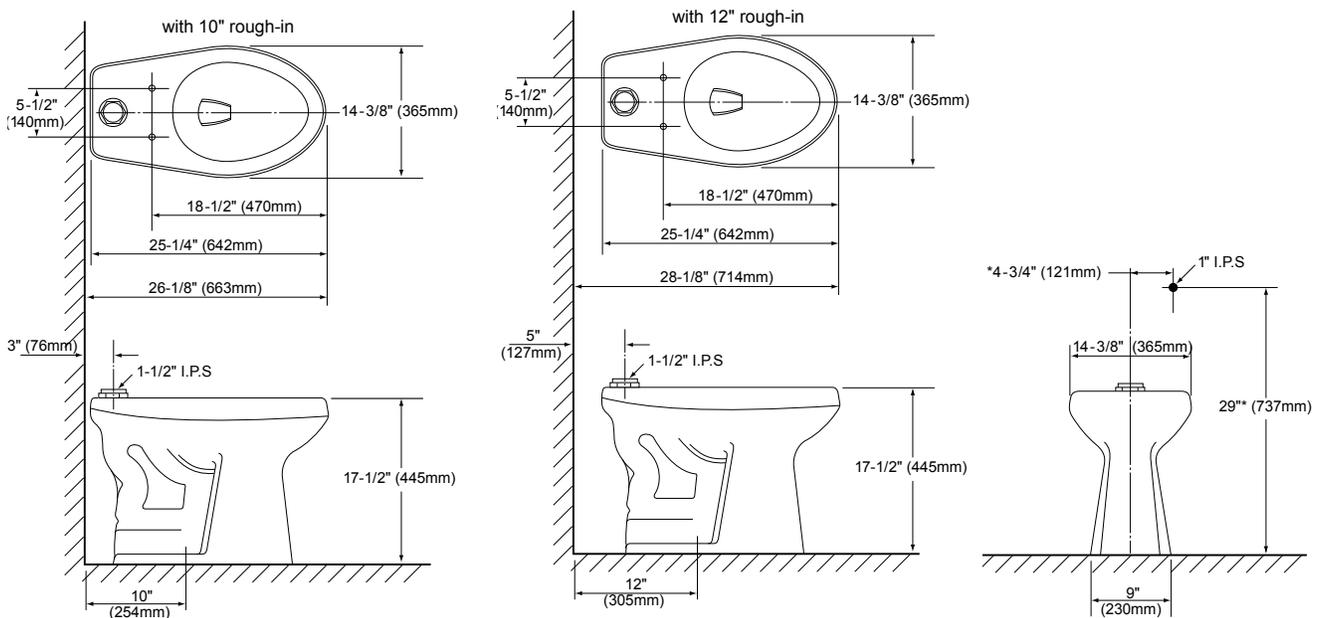

**TOTO®**

*These dimensions and specifications are subject to change without notice*