transolid[®] Shower Bases / Trimslate

Zero Threshold Shower Bases **FZS** Center Drain

FEATURES

- Heavy Duty SMC Sheet Molding Compound Material.
- Light weight. Natural stone effect.
- Bases can be custom sized within a range. See chart below.
- •63" length bases or longer meet ADA requirements.
- Modern stainless steel drain cover conceals a conventional 2" shower drain (not supplied). Color-matched cover for FZS5140C, FZS6040C, FZS6340C, and FZS7940C.
- Stock bases can be used as a Single, Double or Triple Threshold.
- Ultra low 1" threshold front curb for easy access. After underlayment and finished floor are installed, the entrance to the shower becomes virtually flush with bathroom floor.
- Slip-resistant, lightly textured alte floor provides a safe environment yet maintains an easy to clean surface.

Warranty

10 Year Limited Residential / 3 Year Commercial



Modern, low-profile design with a slate look and slip-resistant texture surface.



Modern drain cover for 32C, 36C,



Slate-look slip-resistant texture.

Matching drain for 40C widths.


Customizable Base

42C & 48C widths.

Note: Bases can be built to accommodate unique sizes. Notches can also be cut from the bases to allow for columns in a corner.

Base can be built to custom sizes within certain limtations. Can be trimmed up to 4" in width away from either side of drain or up to 2" from depth on center drain models, 32", 36", 40", 42", and 48" depths (front to back). Base is designed to be used as a single, double or triple threshold in stock sizes and single or double threshold models in custom sizes.



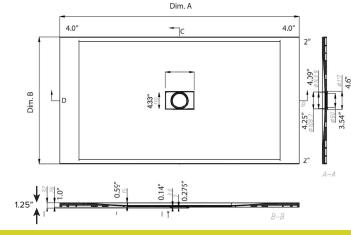

Stock Sized Specified Models

Model No.	Length A	Width B	Height	Ctr C	Ctr D
FZS4836C*	47.2"	35.5"	1.0"	23.6"	17.75"
FZS5140C*	51.2"	39.4"	1.0"	25.6"	19.70"
FZS6032C*	59.1"	31.5"	1.0"	30"	15.75"
FZS6036C*	59.1"	35.5"	1.0"	30"	17.75"
FZS6040C*	59.1"	39.4"	1.0"	30"	19.70"
FZS6042C*	59.1"	41.5"	1.0"	29.5"	20.75"
FZS6048C*	59.1"	47.5"	1.0"	29.5"	23.75"
FZS6332C*	63"	31.5"	1.0"	31.5"	15.75"
FZS6336C*	63"	35.5"	1.0"	31.5"	17.75"
FZS6340C*	63"	39.4"	1.0"	31.5"	19.70"
FZS6642C*	64.9"	41.5"	1.0"	32.4"	20.75"
FZS6648C*	64.9"	47.5"	1.0"	32.4"	23.75"
FZS6736C*	67"	35.5"	1.0"	33.5"	17.75"
FZS7236C*	70.9"	35.5"	1.0"	36.0"	17.75"
FZS7242C*	70.9"	41.5"	1.0"	35.4"	20.75"
FZS7248C*	70.9"	47.5"	1.0"	35.4"	20.75"
FZS7940C*	78.7"	39.4"	1.0"	39.4"	19.70"

*Meets ADA requirements.











- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- · IAPMO
- cUPC®

1-800-766-2452

04/2025

transolid[®] Shower Bases / Trimslate


Zero Threshold Shower Bases FZS Center Drain

FEATURES

- · Heavy Duty SMC Sheet Molding Compound Material.
- · Light weight. Natural stone effect.
- Bases can be custom sized within a range. See chart below.
- •63" length bases or longer meet ADA requirements.
- Modern stainless steel drain cover conceals a conventional 2" shower drain (not supplied). Color-matched cover for FZS5140C, FZS6040C, FZS6340C, and FZS7940C.
- Stock bases can be used as a Single, Double or Triple Threshold.
- Ultra low 1" threshold front curb for easy access. After underlayment and finished floor are installed, the entrance to the shower becomes virtually flush with bathroom floor.
- Slip-resistant, lightly textured alte floor provides a safe environment yet maintains an easy to clean surface.

Warranty

•10 Year Limited Residential / 3 Year Commercial

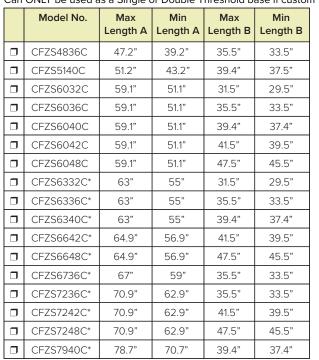

Custom Sized Specific Models (specify length / depth) Can ONLY be used as a Single or Double Threshold base if custom





Compliance Cetifications

• ASME A112.18.1 / CSA B125.125.1-11

Meet or Exceeds the Following Specification









Modern, low-profile design with a slate look and slip-resistant texture surface.



Modern drain cover for 32C, 36C,



Slate-look slip-resistant texture.

Matching drain for 40C widths.

Customizable Base

42C & 48C widths.

Note: Bases can be built to accommodate unique sizes. Notches can also be cut from the bases to allow for columns in a corner.

Base can be built to custom sizes within certain limitations. Can be trimmed up to 4" in width from either side or up to 2" from depth. Base is designed to be used as a single, double or triple threshold in stock sizes and single or double threshold models in custom sizes.



Dim. A 4.0' 4.0" Ł D Dim.

• IGC 154-2012

· IAPMO cUPC[®]