



Features

- Heavy Duty SMC Sheet Molding Compound Material
- Trimslate shower bases with our unique adjustable depth thresholds.
- Maximum depth can be adjusted by up to 2-1/2" without any trimming of the base.
- Trimslate bases can also be customized in the field to fit your space. Trim up to 4" in width from side opposite drain or up to 2" in depth away from drain.
- For bases 60" in length or less, a 60" add on trimmable threshold is included.
- For longer bases, an 80" long add on trimmable threshold is supplied.
- The threshold has a 4" wide flat surface to accommodate shower doors.
- SMC color-matched drain cover conceals a conventional 2" shower drain (not supplied).
- The slate floor has a lightly textured and slip-resistant surface that makes it safe, yet remains easy to clean.
- 13-3/4" center drain location for FZST models.
- 10 Year Limited Residential / 3 Year Commercial Warranty




Stock Sized Specified Models

	Model No.	Length A	Min Width B	Max Width B	Height
☐	FZSDT6032	59.1"	32.5"	35"	2.75"
☐	FZSDT6036	59.1"	36.5"	39"	2.75"
☐	FZSDT6332	63"	32.5"	35"	2.75"
☐	FZSDT6336	63"	36.5"	39"	2.75"
☐	FZSDT6736	67"	36.5"	39"	2.75"
☐	FZSDT7236	70.9"	36.5"	39"	2.75"
☐	FZSDTR6032	59.1"	32.5"	35"	2.75"
☐	FZSDTR6036	59.1"	36.5"	39"	2.75"
☐	FZSDTR6332	63"	32.5"	35"	2.75"
☐	FZSDTR6336	63"	36.5"	39"	2.75"

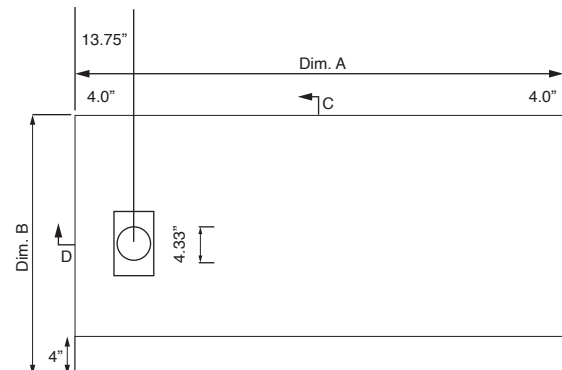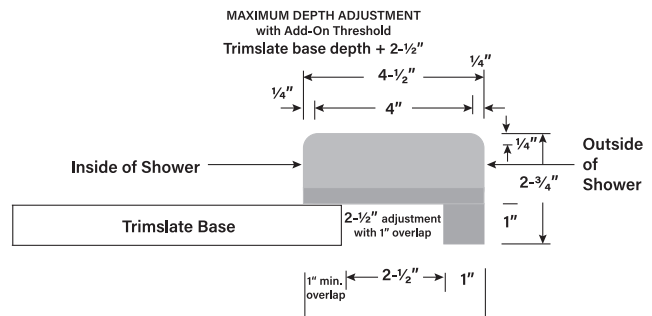

To Be Specified: Color

☐	31 White		White 31		Dk Grey 40
☐	32 Cameo		Cameo 32		Black 09
☐	40 Dark Grey				
☐	09 Black				

Meets or Exceeds the Following Specification

• ASME A112.18.1 / CSA B125.125.1-11

• IGC 154-2012 • cUPC® • IAPMO 